


CHECK VALVE R800CV

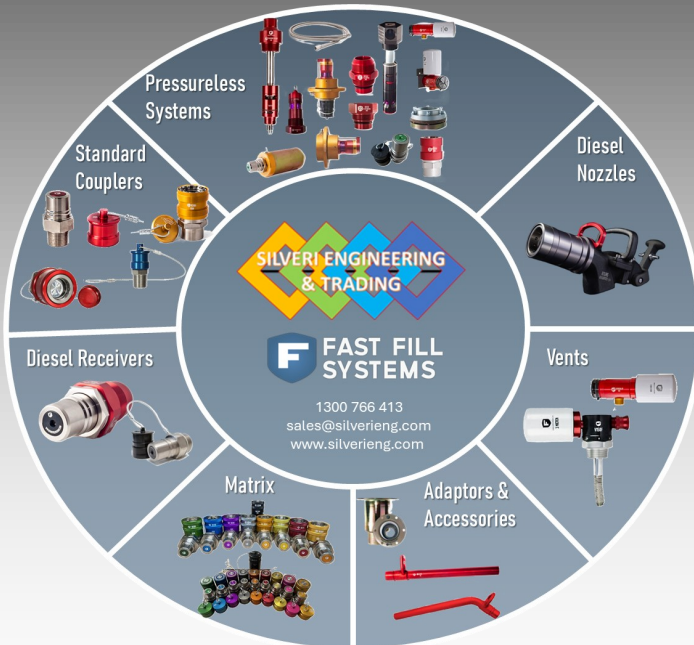

The 800 Litre Diesel Check Valve is engineered to support flow rates of up to **800 litres per minute** when used in conjunction with the **V150H High Flow Vent**. It is also suitable for applications with flow rates of up to **600 litres per minute** in standard configurations when used with the **V150 Standard Vent**.

This unit features a **2" MNPT one-way check valve receiver** specifically designed for diesel fuel systems and pressurised shut-off applications.

Key Features

- ◆ Supports up to 800 L/min with V150H High Flow Vent
- ◆ Suitable for up to 600 L/min with V150 Standard Vent
- ◆ 2" MNPT connection
- ◆ One-way check valve receiver for diesel fuel
- ◆ Designed for pressurised shut-off configurations
- ◆ Allows receiver replacement without draining the fuel tank
- ◆ Max Operating Pressure 8.6 BAR / 125 PSI
- ◆ Common interface compatible with competitor nozzles
- ◆ User-friendly installation kit for easy installation and removal
- ◆ Integrated check valve prevents fuel loss when the poppet is actuated
- ◆ Enables receiver replacement without draining the tank.

